


MODEL  
**MP**

# 高速作動用マイクロ電磁クラッチ/ ブレーキユニット [突き合わせ軸タイプ]

5形、10形、20形、40形、80形

トルク : 0.5~8N・m

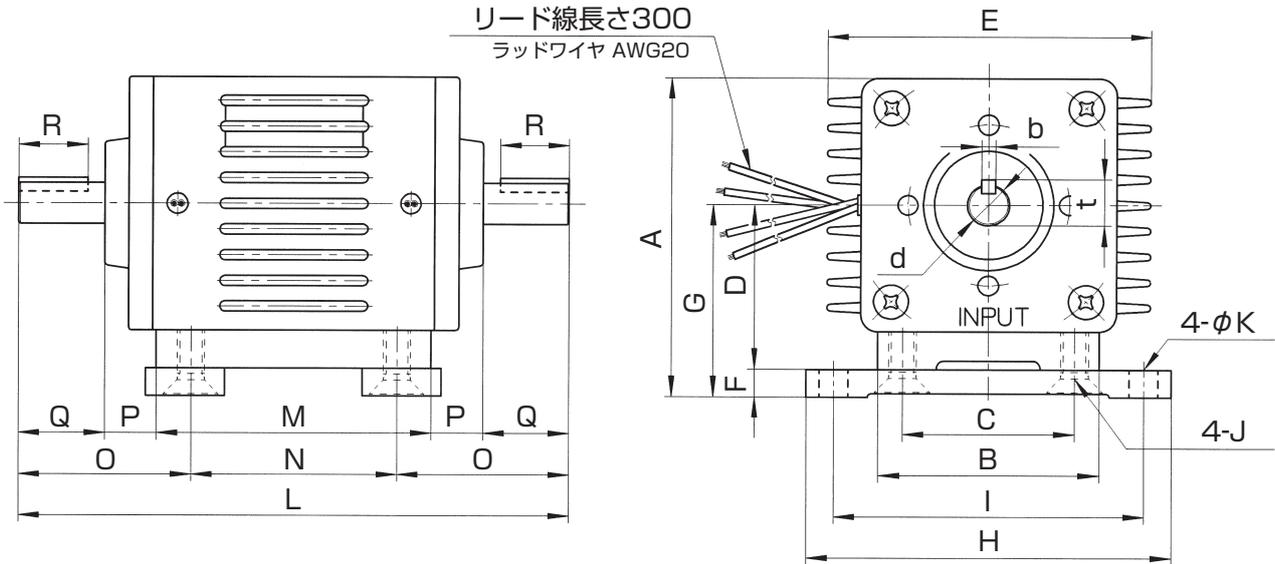

形番		MP	5	10	20	40	80
静摩擦トルク		[N・m]	0.5	1	2	4	8
定格電流		[A]	5	5	5	5	5
慣性	J×10 <sup>-4</sup> (kg・m <sup>2</sup> )	入力軸	0.068	0.148	0.290	0.718	1.30
		出力軸	0.125	0.20	0.450	0.80	2.0
軸径		d <sub>h7</sub>	6	8	10	12	15
軸径		b <sub>h8</sub> ×t <sub>0.15</sub>	2×6.9	2.5×8.9	4×11.5	4×13.5	5×17
径 方 向	A		61.5	69	77	93	105
	B		42	48	55	64	75
	C		32	35	40	50	60
	D		30.5	35	40	48	55
	E		64	74	84	94	104
	F		5	5	5	8	8
	G		35.5	40	45	56	63
	H		72	84	90	106	120
	I		62	70	78	90	100
	J		M5	M6	M6	M8	M8
軸 方 向	K		5.5	6.5	6.5	8.5	8.5
	L		100	124	139	166	194
	M		50	62	69	80	86
	N		40	45	50	60	70
	O		30	39.5	44.5	53	62
	P		9	11	12	13	14
	Q		16	20	23	30	40
質	量	[kg]	0.54	0.92	1.48	2.1	2.9